

6x6 4K HDR HDBaseT Matrix with 4 Mirrored HDMI outputs and audio breakout

MXV-0606-H2A



Quickstart Guide

! WyreStorm recommends reading through this document in its entirety to become familiar with the product's features prior to starting the installation process.




! IMPORTANT! Installation Requirements

- Visit the product page to download the latest firmware, document version, additional documentation, and configuration tools.
- Read through the [Wiring and Connections](#) section for important wiring guidelines before creating or choosing premade cables.
- While this product supports CEC, WyreStorm cannot guarantee compatibility with all forms of CEC communication.

In the Box

- 1x MXV-0606-H2A Matrix
- 1 x AC Power Cord with EU pins
- 1 x AC Power Cord with US pins
- 1 x AC Power Cord with UK pins
- 1 x AC Power Cord with AU pins
- 1x IR Remote
- 6x IR Emitter
- 6x IR Receiver
- 2x Matrix Mounting Brackets with screws
- 1x Quickstart Guide (this document)

Basic Wiring Diagram

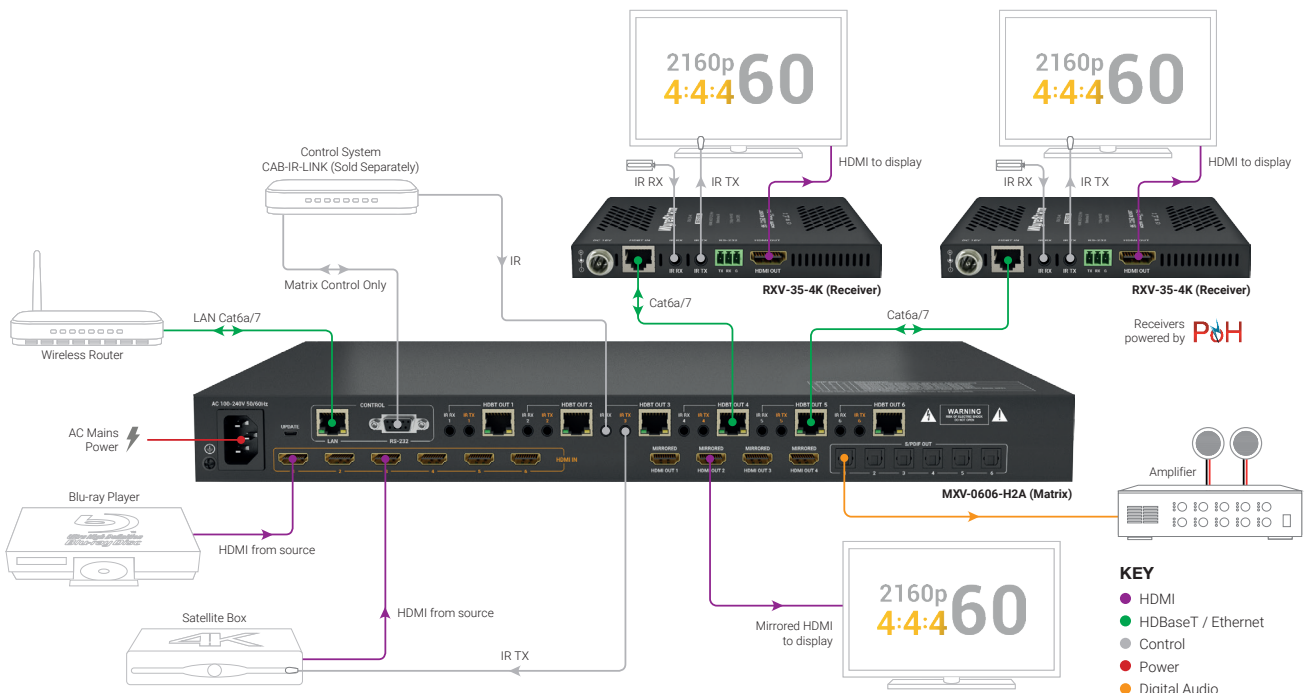

Wiring and Connections

WyreStorm recommends that all wiring for the installation is run and terminated prior to making connections to the switcher. Read through this section in it's entirety before running or terminating the wires to ensure proper operation and to avoid damaging equipment.

! IMPORTANT! Wiring Guidelines

- The use of patch panels, wall plates, cable extenders, kinks in cables, and electrical or environmental interference will have an adverse effect on signal transmission which may limit performance. Steps should be taken to minimize or remove these factors completely during installation for best results.
- WyreStorm recommends the use of shielded category cable to minimize signal noise and interference.
- WyreStorm recommends using pre-terminated HDMI cables due to the complexity of these connector types. Using pre-terminated cables will ensure that these connections are accurate and will not interfere with the performance of the product.

IR TX/RX Guidelines

- Using WyreStorm infrared emitters and receivers is the best way to ensure that most IR coding formats are transmitted and received by the NetworkHD system. Other 3rd party emitters and receivers can be used; however, these devices must operate in the same manner as the WyreStorm devices.
- Due to differences in IR across 3rd party control systems their IR ports should never be connected directly to a NetworkHD system as an incompatibility may exist. WyreStorm offers a cable that compensates for voltage differences as well adjusts for differences in the pins used within the port. Refer to the [CAB-IR-LINK](#) product page for more information.

RS-232 Wiring

Most control systems and computers are DTE where pin 2 is RX, this can vary from device to device. Refer to the documentation for the connected device for pin functionality to ensure that the correct connections can be made.

Cat6 Cable Performance Guide



WyreStorm recommends the use of shielded cable to minimize signal noise and interference


IR TX Port Pinout

Connection for IR TX (transmit) uses a 3.5mm (1/8in) mono plug.




IR RX Port Pinout

Connection for IR RX (receive) uses a 3.5mm (1/8in) stereo jack that outputs +5V DC to power the included IR receiver.



Matrix RS-232 Port



WyreStorm Connector		3rd Party Device
Pin 2	TX (Transmit)	---> To ---> RX (Receive)
Pin 3	RX (Receive)	---> To ---> TX (Transmit)
Pin 5	G (Ground)	---> To ---> G (Ground)

Setup and Configuration

Setup for this matrix including EDID is performed within the Web UI. Refer to [Accessing the Web UI](#) for details.

Accessing the Web UI

This matrix is set to a default static IP Address (192.168.11.143). In order to communicate with it initially the PC must be set to a 192.168.11.xxx address with a subnet of 255.255.0.0. This can be changed back once a static IP is set within a different range.

1. Connect the matrix to the same network as a PC.
2. Open a web browser and enter the IP Address of the matrix.
Default: 192.168.11.143 | Password: admin

Note: The installer password and general password are the same by default. WyreStorm recommends changing the password for installer login to avoid any unwanted changes being made to the matrix configuration.

Troubleshooting

No or Poor Quality Picture (snow or noisy image)

- Verify that power is being supplied to the transmitter and receiving device
- Verify that all HDMI and HDBaseT connections are not loose and are functioning properly
- Verify that the HDBaseT cable is properly terminated following EIA568B standard
- Verify that the output resolution of the source and display is supported by this matrix and receiver.
- If transmitting 3D or 4K, verify that the HDMI cables used are 3D or 4K rated.

No or Intermittent 3rd party Device Control

- Verify that the IR and RS-232 cables are properly terminated following the [Wiring and Connections](#) section.



Troubleshooting Tips:

- WyreStorm recommends using a cable tester or connecting the cable to other devices to verify functionality.

Specifications

Audio and Video				
Inputs	6x HDMI In: 19-pin type A			
Outputs	6x HDBT Out: 8-pin RJ-45 Female 6x S/PDIF Out: Toslink (Digital Optical) 4x HDMI Out: 19-pin type A			
Output Video Encoding	HDBaseT Class B			
Encoding Data Rate	9.2Gbps			
End to End Latency (Max)	10µs (micro seconds)			
Audio Formats	Analog: 2ch Analog S/PDIF: 2ch LPCM Dolby Digital/DTS up to 5.1ch HDMI: 2ch LPCM Multichannel up to Dolby Atmos and DTS-X			
Video Resolutions (Max)	Video Resolution	HDMI	Cat6	Cat6a/7
	1920x1080p @60Hz 12bit	15m/49ft	60m/197ft	70m/230ft
	1920x1080p @60Hz 16bit	7m/23ft	35m/115ft	40m/131ft
	3840x2160p @24Hz 10bit 4:2:0 HDR	3m/10ft	35m/115ft	40m/131ft
	3840x2160p @30Hz 8bit 4:4:4	7m/23ft	35m/115ft	35m/115ft
	3840x2160p @60Hz 10bit 4:2:0 HDR	3m/10ft	35m/115ft	40m/131ft
	4096x2160p @60Hz 8bit 4:2:0	7m/23ft	35m/115ft	40m/131ft
	4096x2160p @60Hz 8bit 4:4:4	7m/23ft	35m/115ft	40m/131ft
Note: WyreStorm recommends the use of shielded category cable to minimize signal noise and interference				
Supported Standards	DCI RGB HDR HDR10 Dolby Vision up to 30Hz HLG BT.2020 BT.2100			
Maximum Pixel Clock	HDMI: 600MHz HDBaseT: 297MHz			
Communication and Control				
HDMI	HDMI 2.0 HDCP 2.2 EDID CEC DVI/D supported with adapter (not included)			
HDBaseT	HDMI 2.0 HDCP 2.2 EDID CEC 1-way PoH Bidirectional IR			
CEC	CEC power triggering Requires CEC compatibility HDMI outputs only			
IR	6x IR RX: 3.5mm (1/8in) TRS Stereo 6x IR TX: 3.5mm (1/8in) TS Mono Bidirectional over HDBaseT			
RS-232	1x RS-232: 9-pin DB9 Female			
Ethernet	1x LAN: 8-pin RJ-45 Female			
Power				
Power Supply	100~240V AC 50/60Hz			
Max Power Consumption	135W			
Environmental				
Operating Temperature	0 to + 45°C (32 to + 113 °F), 10% to 90%, non-condensing			
Storage Temperature	-20 to +70°C (-4 to + 158 °F), 10% to 90%, non-condensing			
Maximum BTU	461 BTU/hr			
Dimensions and Weight				
Rack Units/Wall Box	1U			
Height	43.5mm/1.72in			
Width	440mm/17.33in			
Depth	300mm/11.82in			
Weight	4.95kg/10.89lbs			
Regulatory				
Safety and Emission	CE FCC RoHS RCM			

Note: WyreStorm reserves the right to change product specification, appearance or dimensions of this product at any time without prior notice.

Warranty Information

WyreStorm Technologies LLC warrants that its products to be free from defects in material and workmanship under normal use for a period of five (5) years from the date of purchase. Refer to the Product Warranty page on wyrestorm.com for more details on our limited product warranty.

