

MAESTRO

Quantum



Subject to modifications and errors, picture similar to product

No matter how you listen to your music, our MAESTRO Quantum can cater to your personal and individual needs. Iconic design, extensive features and connections, a focus on user-friendliness and outstanding sound. CD player, FM, digital and Internet radio, as well as streaming services guarantee a versatile music experience. It is

operated directly on the device, via the remote control or via the sonoro app. All this brought into a compact format with a great deal of passion and expertise and assembled from the best components. SOUND. DESIGNED




SONORO

GERMAN AUDIO DESIGN
www.sonoro.com

MAESTRO Quantum

DESIGN

Hand-polished wooden casing with high-quality finish with lacquer. Aluminum front made from one piece with floating optic. Designed and developed in Germany.

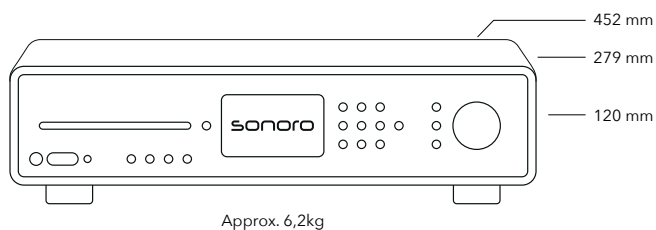

PRODUCT HIGHLIGHTS

- 4-inch big display with optimised contrast
- New intuitive user interface
- Control via the sonoro audio app
- Highly efficient Hypex amplifiers
- ESS Technology SABRE Digital-to-Analogue Converters (DACs)
- DIRAC Live (licence included - up to 200 Hertz)
- Room correction to minimise room modes (optional measuring microphone required)
- Adaptive Loudness function (for optimal tonal balance)
- Optimal equalizer presets for sonoro loudspeakers + Dynamic Bass function (for optimised bass reproduction)
- Apple AirPlay, Chromecast built-in
- Room Ready (subscription required) for a cross-source music library, available Q1/2024
- Numerous connection options (e.g. HDMI (eARC), USB-C, stereo pre out, line out, phono, etc.)
- Smart Home Ready (Busch-free@home, KNX, Gira X1)



TECHNICAL SPECIFICATIONS

Sound	Highly efficient Class-D Hypex amplifiers 2 x 180 watts at 4 Ω / 2 x 110 watts at 8 Ω @ 0.1 % THD Operation of external loudspeakers with an impedance from 4 to 16 Ω Bass, treble & balance adjustment Adaptive loudness function as well as other modes, such as 2.1 systems with high-pass filter Optimal equalizer presets for sonoro speakers + Dynamic Bass function (for optimised bass reproduction) Dirac Live room correction App	Power connection	Built-in power supply (AC 220-240V ~ 50/60Hz) with power switch Mains cable with phase marking
4" TFT colour display	High resolution; graphic & automatic brightness adjustment	Music streaming	FM & DAB+ digital radio, internet radio Podcast Slot-in CD-player (CD, CD-R, CD-RW, MP3-CD, WMA) with repeat and shuffle function Bluetooth® (A2DP, AVRCP) Qualcomm aptX™ Bluetooth® audio-technology Bi-directional Bluetooth® connection for Bluetooth® wireless headset Apple AirPlay, Chromecast built-in Spotify Connect™, TIDAL Connect™, Napster™, Qobuz™, Deezer™ DLNA, UPnP Phono preamplifier for MM cartridges
Encryption	WEP, WPA2 (PSK), WPA3, WPS	Input/Output	HDMI (eARC) USB-A, USB-C (charging and playback function) Aux-In (3.5 mm jack) Gold-plated Aux-In (Cinch input) Stereo Pre-Out, Line-Out Gold-plated phono input (for MM cartridges) 1x digital optical and 1x coaxial input Headphone jack (3.5 mm jack) Gold-plated loudspeaker screw connections
Network	WLAN: IEEE 802.11 a/b/g/n/ac/ax, 2,4/5 GHz LAN network connection		
Stations search	Automatic & manual		
Sleep-timer	5 - 120 min. (adjustable in 5-minute intervals)		
Stations buttons	A total of 99 local favourite storage locations for all music sources (additional storage options e.g. with streaming + internet radio providers possible).		
Operation	With the remote control Control via the sonoro audio app Directly on the product Smart Home Ready		