

ORCHESTRA

Shaped *Signature*



Subject to modifications and errors, picture similar to product


The ORCHESTRA Shaped Signature is more than a column speaker - it is a clear statement. With our first 3-way loudspeakers, we at sonoro are taking hi-fi to the next level, while staying true to our German Audio Design philosophy. Developed in close collaboration with renowned audio expert Karl-Heinz Fink - a name synonymous

with outstanding sound quality across all price ranges - these are our most refined loudspeakers to date. The result: a meticulously tuned design that delivers top-tier audiophile performance yet remains accessible and affordable.

sonoro

GERMAN AUDIO DESIGN
www.sonoro.com

ORCHESTRA Shaped *Signature*

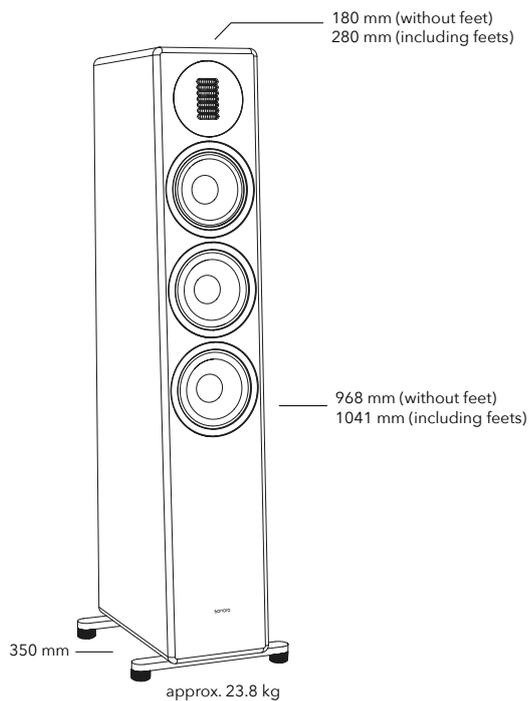

White (matte)
Silver



Black (matte)
Black

DESIGN

- Hand-ground wooden body with a high-quality matte finish
- Rounded housing edges and aluminum details for an elegant aesthetic
- Flush-mounted chassis integration with no visible screws

AIR MOTION TRANSFORMER

- Silky highs and wide frequency response
- Spatial sound image
- Powerful neodymium driver
- Newly designed faceplate for improved dispersion characteristics

MIDRANGE DRIVER

- Kevlar-reinforced paper/bamboo composite material for an open and dynamic sound reproduction
- New development with folded fabric surround
- Sturdy die-cast basket

2 x WOOFER

- Kevlar-reinforced paper/bamboo composite material for powerful performance and rich bass
- Flow-optimised bass reflex tube for voluminous bass
- Built-in resonator for dynamic basses
- Sturdy die-cast basket

TECHNICAL SPECIFICATIONS

Type	3-way floorstanding loudspeaker
Woofer	2 x 5.25" composite cone, rubber surround, die-cast basket, 35.5 mm voice coil
Midrange driver	1 x 5.25" composite cone, fabric surround, die-cast basket, 35.5 mm voice coil
Tweeter	Air Motion Transformer with neodymium drive, diaphragm area approx. 85cm ² (folded)
Cabinet	HDF (high-density fibreboard)
Power output	Frequency range: 35Hz - 24kHz @ -6dB Impedance: 4 Ohm (minimum 3.6 Ohm @ 37 Hz) Recommended amplifier power: from 50 watts Sensitivity: 88 dB @ 1m & 2.83 Volt Crossover frequencies: 300 Hz, 2,700 Hz Crossover: 4th order LKR
Loudspeaker cover	Removable, magnetic
Others	Foam plugs for bass reflex tube Height-adjustable feet and spikes including coasters